


- 安装方法：垂直安装；
- 安装气液分离器须尽量靠近压缩机的吸气口；
- 进出口材料：紫铜；
- 最大许可工作压力 [bar]： 28 15
- 许可工作温度 [°C]： 100...-10 -10...-50
- 适用制冷剂：R134a、R22、R407C、R404A、R507A；
- 强烈推荐在蒸发温度低于-15°C的制冷装置中安装FAV系列冷热交换器。

- Installation method: Vertical installation;
- Please assemble the accumulator as close to the suction connection of compressor as possible;
- The material of inlet and outlet: Copper;
- The Max. Allowed Working Pressure [bar]: 28 15
- Allowed Working Temperature [°C]: 100...-10 -10...-50
- Applicative refrigerants: R134a、R22、R407C、R404A、R507A;
- It is strongly recommended to assemble FAV Series Cooling&Heating Exchanger to the refrigeration equipment whose evaporate temperature is lower than -15°C.

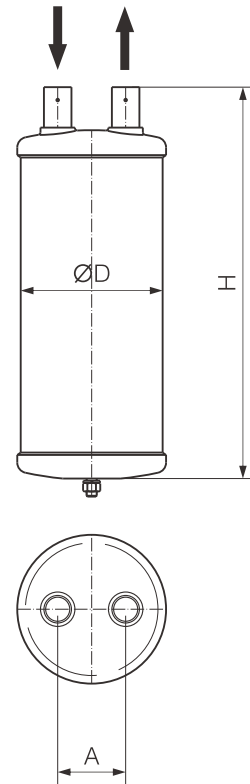

a

型号 Model	接口尺寸 Joint Size (Inch)	ØD (mm)	H (mm)	A (mm)	容积 Volume (l)	图例 Fig.
FA-204	1/2"	102	250	53	1.5	a
FA-205	5/8"	102	310	54	2	a
FA-206	3/4"	140	302	80	3.3	a
FA-207	7/8"	140	362	81	4.2	a
FA-208	1-1/8"	165	453	79	7.3	a
FA-209	1-3/8"	165	588	84	9.9	a
FA-210	1-5/8"	165	643	82	10.8	a